



STANDARD PANEL MODULE

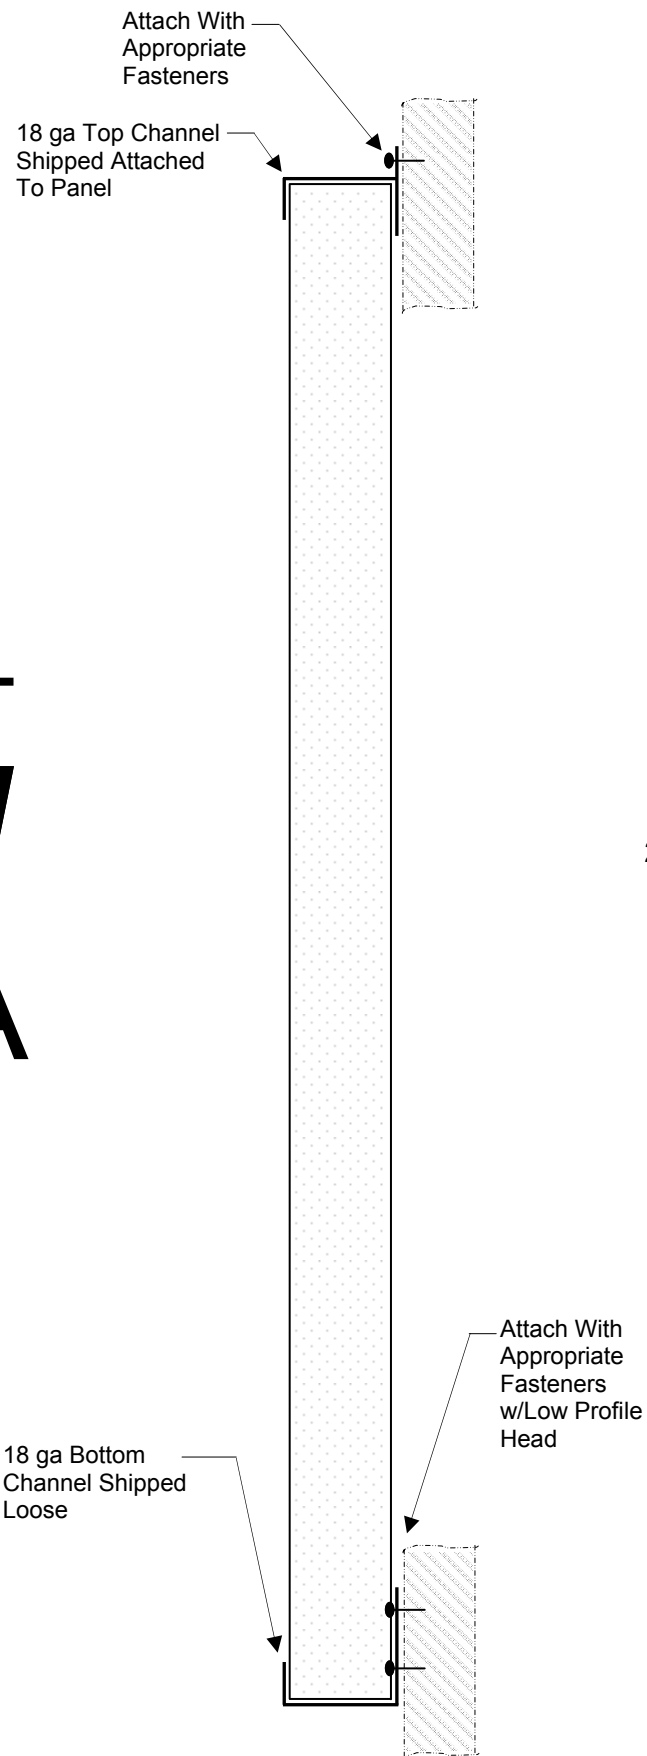


NOTES:

1. Panels may be constructed using alternate gauge and /or material body.
2. Bottom mounting channel is shipped loose, top mounting channel is shipped attached to panel.
3. Standard panels are uncoated galvanealed steel perforated with .093" diameter holes on .156" staggered centers for 33% open area. Several factory finish paint coatings are available including powder coating.
4. Optional encapsulation of panel acoustical fill available.
5. Optional sealed fill for Class 100 Clean Room use.
6. Panels meet ASTM E-84 Class I Fire Rating.
7. For installation the required clear height from the bottom channel equals panel length + 3".
8. Standard panel weight = 1.75 lbs/ft².

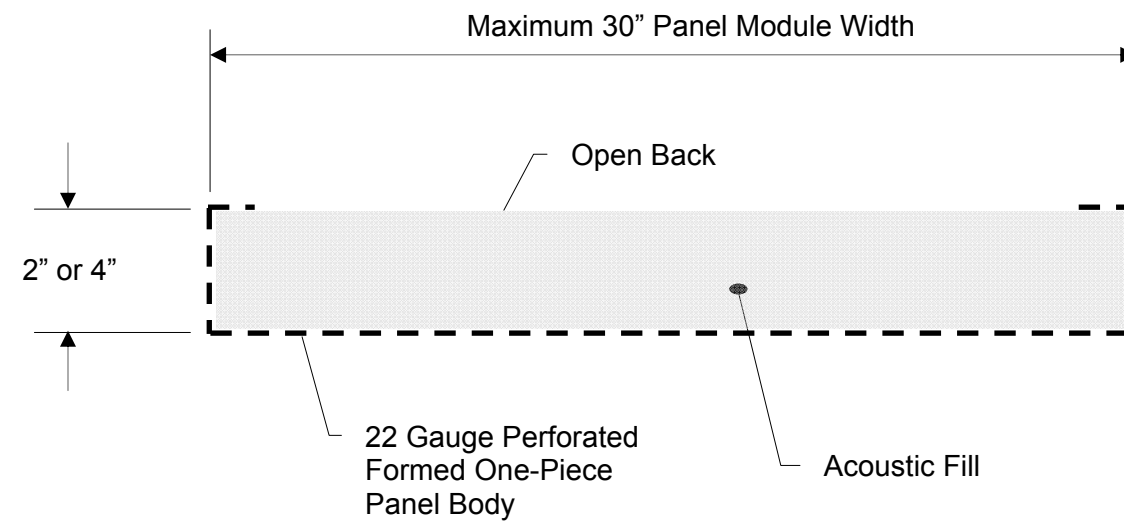

VIEW "A"
STANDARD PANEL CONSTRUCTION

	PRODUCT LINE: PanI-Sorb [®] Acoustical Wall Panels
	DETAIL: Standard Panel Construction Model PSPM
Industrial Noise Control, Inc. 401 Airport Road • North Aurora, IL 60542 800-954-1998 • www.inc-noise.com	TECHNICAL BULLETIN NO.: 007-1001-001